



## HyTalk PMR Gateway

Bridge networks. Bring connectivity.

- Enhanced collaboration
- Ease of use
- Extended reach
- Low latency









## Overview

As broadband services increasingly flourish, some industries tend to buy broadband radios as a new communications way. However, these radios cannot be connected to the legacy narrowband radios. Replace all your legacy? It will be a large investment. Thus, we innovate HyTalk PMR Gateway to solve this problem for business, public safety, transportation, utilities, and more.

HyTalk PMR Gateway is a cost-effective narrowband-broadband interconnection solution, including BN100 voice gateway box, MNC360 PoC mobile radio, and HM78X or HM65X digital mobile radio. It has the capability to seamlessly connect the narrowband radios and broadband radios. Moreover, interworking with public network, it allows narrowband radios to communicate with each other anywhere.

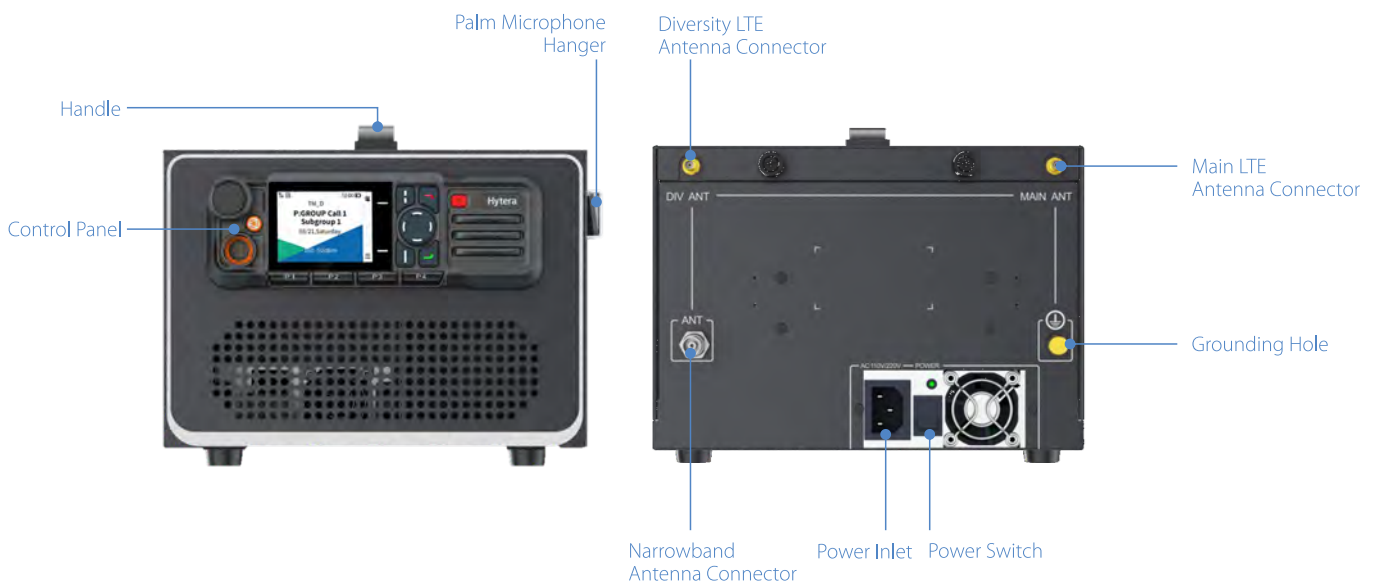


## Key Benefits

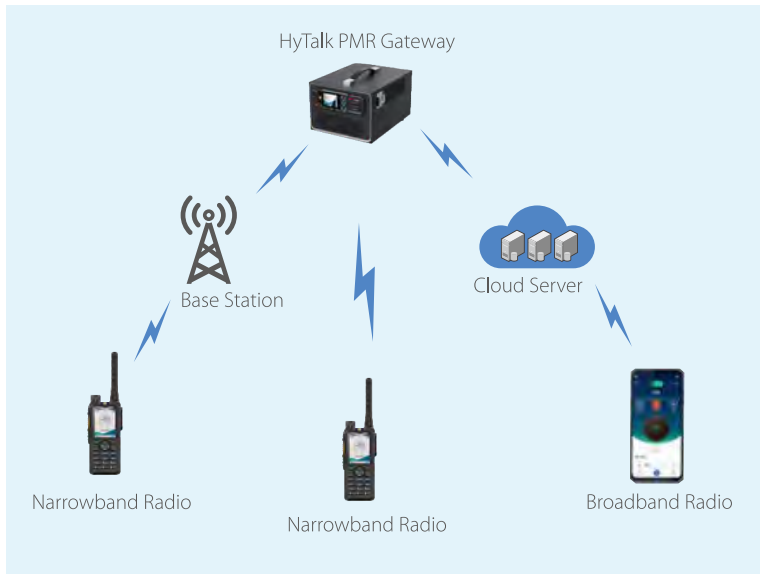

### Enhanced collaboration

This solution unleashes the collaborative potential of radios in the field, no matter whether they are narrowband or broadband. This enables different user groups to seamlessly communicate with each other in a unified way for increased work efficiency.

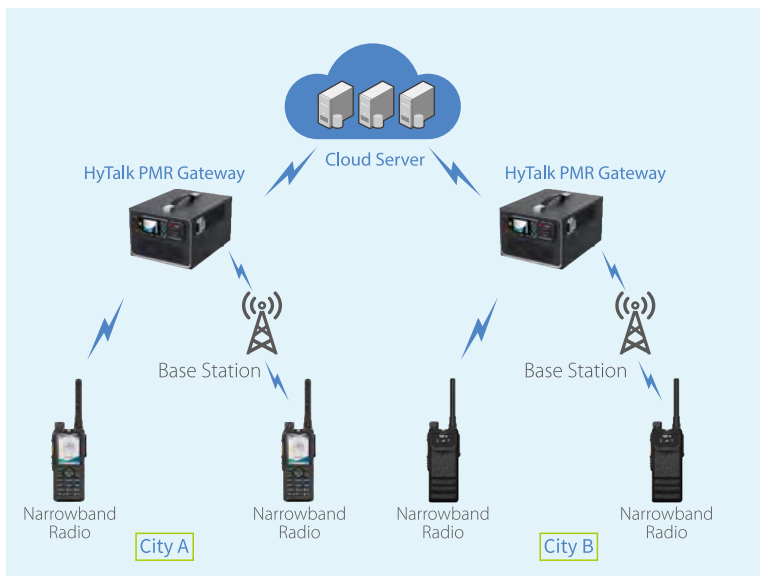

### Extended reach

Leveraging the public network, this solution cost-effectively interconnects PMR networks in different regions, without building extra expensive ground infrastructure. So legacy narrowband radios can be reused for voice communication without boundaries, protecting the existing investments in narrowband.

### Ease of use

Simple but intuitive, this solution is easy to deploy and use. The voice gateway box containing two mobile radios is compact and weighs less than 8 kg, which is designed for easy transport. A handle on the top of this box ensures a comfortable grip and fast carrying.

### Low latency

This solution supports back-to-back connection between one PMR mobile radio and one PoC mobile radio. This greatly accelerates transmission rate and reduces audio latency. Thus, narrowband and broadband radio users can stay connected quickly.



## Application Scenarios



Industrial Park



Public Safety



Transportation



Utilities

## Specifications

### General

Dimensions (L x W x H) 288 mm x 244 mm x 158 mm

Weight No mobile radio: 2.8 kg  
With two mobile radios: 7.2 kg

### Connector and Switch

Narrowband Antenna Connector 1

LTE Antenna Connector 2

Power Inlet 1

Power Switch 1

Palm Microphone Connector 1

Input Voltage 100 - 240 V AC

### Environmental

Operating Temperature -20°C to +60°C

Storage Temperature -40°C to +85°C



**Hytera Communications Corporation Limited**  
Stock Code: 002583.SZ

**Address:** Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, P.R.C.

**Tel:** +86-755-2697 2999 **Fax:** +86-755-8613 7139 **Post:** 518057

**Http:** //www.hytera.com **marketing@hytera.com**



Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

**HYT**, Hytera are registered trademarks of Hytera Communications Corp., Ltd.  
©2023Hytera Communications Corp., Ltd. All Rights Reserved.